




TOP PROFILE

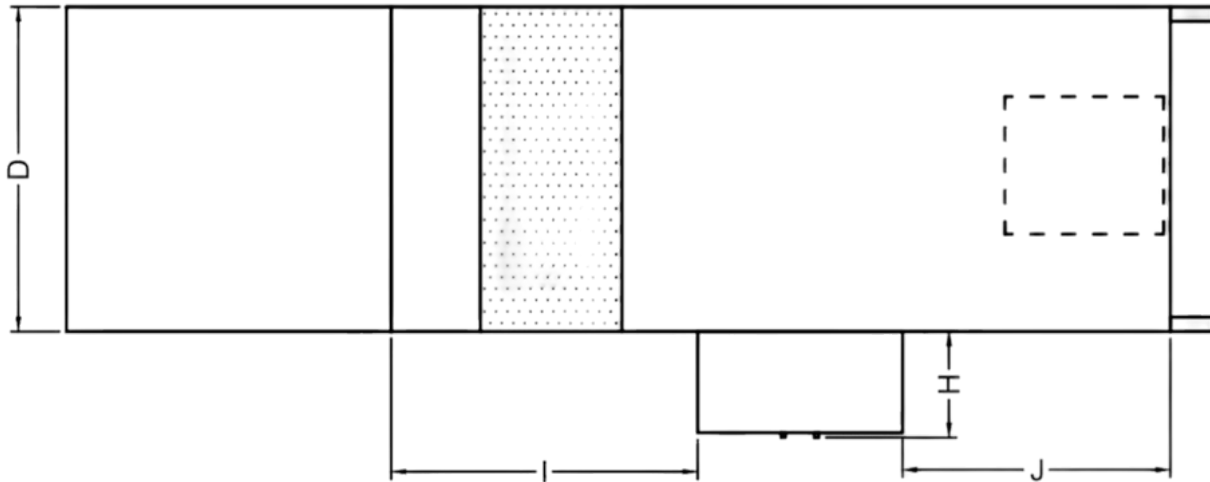

SIDE PROFILE

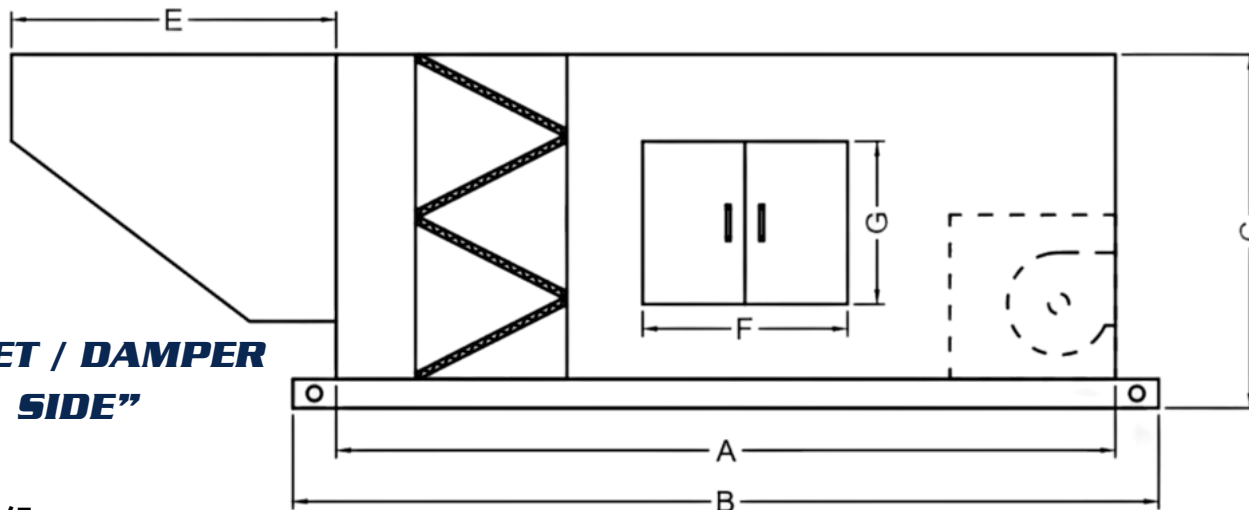

FRONT PROFILE

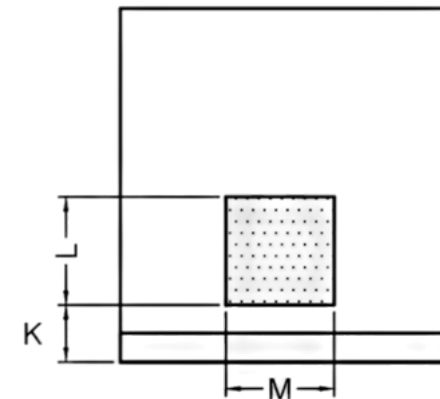

"DISCHARGE / BLOWER SIDE"

NOTES

- Model shown is "front discharge", all models can be configured as either front discharge, down discharge or up discharge.
- All noted sizes are in inches (+/- 1/4")
- Location of Filter Access Door, Blower Access Door and Control Panel can be configured to your preference as per below selections.
- Dimensions are subject to change without notice
- Standard external static pressure is 3/4"
- Maximum Gas Pressure: 14" WC
- Standard Temperature Rise is 90 Degrees f, 105 degrees f is available on request.

MODEL	CFM RANGE	DAMPER SIZE (INCHES)	FILTER SIZE QTY		GAS TRAIN SIZE (NPT)
SAA15	4,000 - 6,000	30x50	20 x 24	3	1
			24 x 24	3	
SAB18	6,001 - 12,500	30x50	20 x 24	3	1
			24 x 24	3	
SAC20	12,501 - 16,000	30x50	20 x 24	9	1-1/4
			24 x 24	3	
SAD22	16,001 - 19,000	54x60	24 x 24	12	1-1/2
SAD25	19,001 - 22,000	54x60	24 x 24	12	1-1/2
SAE27	22,001 - 33,000	54x60	24 x 24	12	1-1/2

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	WEIGHT (LBS)
SAA15	96	108	60	45	45	45	39	21	32.5	30.5	13.37	15.87	21.87	1500
SAB18	108	120	60	45	45	45	39	21	32.5	30.5	13.37	18.87	21.87	2000
SAC20	132	144	60	60	45	45	39	21	34	53	15.25	24.75	24.75	2500
SAD22	132	144	72	72	45	55	39	21	34	53	17.50	27.25	27.25	3500
SAD25	132	144	72	72	45	55	39	21	34	53	18.75	31.25	31.25	3500
SAE27	144	156	72	72	45	55	39	21	34	65	20.75	34.25	34.25	4500